


A full line of products meet every need

Clean
Metal



■ 鋳付クリーンメタル標準寸法表 Standard dimensions for flanged Clean Metal bearings

内径 (ϕ DI)	外径 (ϕ DO)	シャフト 外径(ϕ DS)	ハウジング 内径(ϕ DH)	肉 厚		鋳下ブッシュの長さ (L) ± 0.4												
				ブッシュ 肉厚 T1	フランジ 肉厚 T2	6	8	10	12	15	20	25	30	40	50	60	80	
6	8	6 ± 0.025 -0.037	8(H7) ± 0.015 -0	1.0 ± 0.03	1.0 ± 0.2	CB85 0606-12T	CB85 0608-12T	CB85 0610-12T										
7	9	7 ± 0.025 -0.040	9(H7) //					CB85 0710-13T	CB85 0712-13T									
8	10	8 //	10 //			CB85 0806-15T	CB85 0808-15T	CB85 0810-15T	CB85 0812-15T									
10	12	10 //	12(H7) ± 0.018 -0			CB85 1006-18T	CB85 1008-18T	CB85 1010-18T	CB85 1012-18T	CB85 1015-18T								
12	14	12 ± 0.025 -0.043	14 //			CB85 1206-20T	CB85 1208-20T	CB85 1210-20T	CB85 1212-20T	CB85 1215-20T	CB85 1220-20T							
14	16	14 //	16 //					CB85 1410-22T	CB85 1412-22T	CB85 1415-22T	CB85 1420-22T							
15	17	15 //	17 //					CB85 1510-23T	CB85 1512-23T	CB85 1515-23T	CB85 1520-23T	CB85 1525-23T						
16	18	16 //	18 //					CB85 1610-24T	CB85 1612-24T	CB85 1615-24T	CB85 1620-24T	CB85 1625-24T						
18	20	18 //	20(H7) ± 0.021 -0	1.5 ± 0.03	1.5 ± 0.2			CB85 1810-26T	CB85 1812-26T	CB85 1815-26T	CB85 1820-26T	CB85 1825-26T						
20	23	20 ± 0.025 -0.046	23 //			CB85 2010-31T	CB85 2012-31T	CB85 2015-31T	CB85 2020-31T	CB85 2025-31T	CB85 2030-31T							
22	25	22 //	25 //					CB85 2210-33T	CB85 2212-33T	CB85 2215-33T	CB85 2220-33T	CB85 2225-33T						
24	27	24 //	27 //							CB85 2415-35T	CB85 2420-35T	CB85 2425-35T	CB85 2430-35T					
25	28	25 //	28 //					CB85 2510-36T	CB85 2512-36T	CB85 2515-36T	CB85 2520-36T	CB85 2525-36T	CB85 2530-36T					
28	32	28 //	32(H7) ± 0.025 -0							CB85 2820-40T		CB85 2830-40T						
30	34	30 //	34 //						CB85 3012-42T	CB85 3015-42T	CB85 3020-42T	CB85 3025-42T	CB85 3030-42T	CB85 3040-42T				
32	36	32 ± 0.025 -0.050	36 //							CB85 3220-46T		CB85 3230-46T						
35	39	35 //	39 //	2.0 ± 0.03	2.0 ± 0.2			CB85 3512-49T		CB85 3520-49T	CB85 3525-49T	CB85 3530-49T	CB85 3540-49T	CB85 3550-49T				
38	42	38 //	42 //									CB85 3830-52T	CB85 3840-52T					
40	44	40 //	44 //					CB85 4012-54T		CB85 4020-54T	CB85 4025-54T	CB85 4030-54T	CB85 4040-54T	CB85 4050-54T				
45	50	45 //	50 //							CB85 4520-60T	CB85 4525-60T	CB85 4530-60T	CB85 4540-60T	CB85 4550-60T				
50	55	50 //	55(H7) ± 0.030 -0							CB85 5020-65T		CB85 5030-65T	CB85 5040-65T		CB85 5050-65T			
55	60	55 ± 0.025 -0.055	60 //			2.5 ± 0.03	2.5 ± 0.3					CB85 5530-70T	CB85 5540-70T		CB85 5550-70T			
60	65	60 //	65 //											CB85 6030-75T	CB85 6040-75T		CB85 6050-75T	

鋳付クリーンメタル標準品図面
Standard diagram for flanged Clean Metal bearings

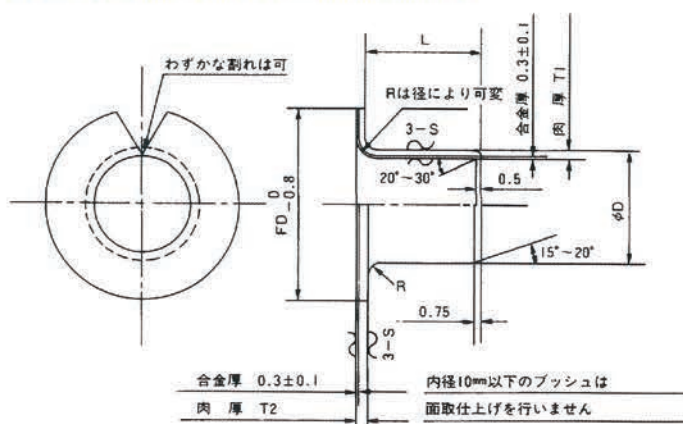

部品番号の表示方法
Part number codes

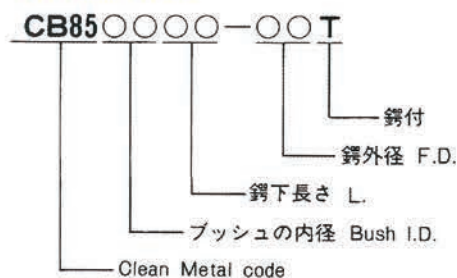


■ クリーンメタル標準寸法表 Standard dimensions for Clean Metal bearings

内径 φD	外径 φDs	シャフト 外径(φDs)	ハウジング 内径(φDH)	ブッシュの長さ(L) ⁰ _{-0.4}															
				4	5	6	8	10	12	15	20	25	30	40	50	60	80	90	95
4	6	4 ^{-0.025} _{-0.037}	6(H7) ^{+0.012} ₋₀	CB85 0404		CB85 0406	CB85 0408												
5	7	5 //	7(H7) ^{+0.015} ₋₀	CB85 0504	CB85 0505	CB85 0506	CB85 0508												
6	8	6 //	8(H7) //			CB85 0606	CB85 0608	CB85 0610											
7	9	7 ^{-0.025} _{-0.040}	9(H7) //					CB85 0710	CB85 0712										
8	10	8 //	10 //			CB85 0806	CB85 0808	CB85 0810	CB85 0812										
10	12	10 //	12(H7) ^{+0.018} ₋₀			CB85 1006	CB85 1008	CB85 1010	CB85 1012	CB85 1015									
12	14	12 ^{-0.025} _{-0.043}	14 //			CB85 1206	CB85 1208	CB85 1210	CB85 1212	CB85 1215	CB85 1220								
14	16	14 //	16 //					CB85 1410	CB85 1412	CB85 1415	CB85 1420								
15	17	15 //	17 //					CB85 1510	CB85 1512	CB85 1515	CB85 1520	CB85 1525							
16	18	16 //	18 //					CB85 1610	CB85 1612	CB85 1615	CB85 1620	CB85 1625							
18	20	18 //	20(H7) ^{+0.021} ₋₀					CB85 1810	CB85 1812	CB85 1815	CB85 1820	CB85 1825							
20	23	20 ^{-0.025} _{-0.046}	23 //					CB85 2010	CB85 2012	CB85 2015	CB85 2020	CB85 2025	CB85 2030						
22	25	22 //	25 //					CB85 2210	CB85 2212	CB85 2215	CB85 2220	CB85 2225							
24	27	24 //	27 //							CB85 2415	CB85 2420	CB85 2425	CB85 2430						
25	28	25 //	28 //					CB85 2510	CB85 2512	CB85 2515	CB85 2520	CB85 2525	CB85 2530						
28	32	28 //	32(H7) ^{+0.025} ₋₀								CB85 2820		CB85 2830						
30	34	30 //	34 //						CB85 3012	CB85 3015	CB85 3020	CB85 3025	CB85 3030	CB85 3040					
32	36	32 ^{-0.025} _{-0.050}	36 //								CB85 3220		CB85 3230						
35	39	35 //	39 //						CB85 3512		CB85 3520	CB85 3525	CB85 3530	CB85 3540	CB85 3550				
38	42	38 //	42 //									CB85 3830	CB85 3840						
40	44	40 //	44 //						CB85 4012		CB85 4020	CB85 4025	CB85 4030	CB85 4040	CB85 4050				
45	50	45 //	50 //								CB85 4520	CB85 4525	CB85 4530	CB85 4540	CB85 4550				
50	55	50 //	55(H7) ^{+0.030} ₋₀								CB85 5020		CB85 5030	CB85 5040		CB85 5060			
55	60	55 ^{-0.025} _{-0.055}	60 //										CB85 5530	CB85 5540		CB85 5560			
60	65	60 //	65 //										CB85 6030	CB85 6040		CB85 6060			
65	70	65 ^{+0.035} _{+0.005}	70 //										CB85 6530	CB85 6540		CB85 6560			
70	75	70 //	75 //											CB85 7040		CB85 7060	CB85 7060		
75	80	75 //	80 //										CB85 7530	CB85 7540		CB85 7560	CB85 7580		
80	85	80 //	85(H7) ^{+0.035} ₋₀											CB85 8040		CB85 8060	CB85 8080		
85	90	85 ^{+0.035} _{+0.000}	90 //											CB85 8540		CB85 8560	CB85 8580		
90	95	90 //	95 //											CB85 9040		CB85 9060		CB85 9090	
100	105	100 //	105 //												CB85 10050				CB85 10095

●御用命により、ブッシュ内径3φ〜140φまでお受け致します。

クリーンメタル標準品図面

Standard diagram for Clean Metal bearings

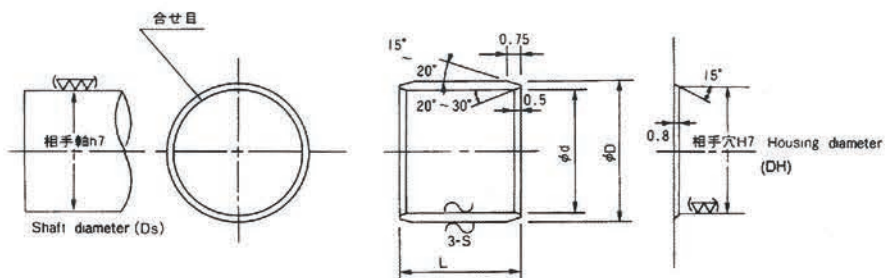

部品番号の表示方法

Part number codes

CB85—○○○○

ブッシュの長さ Bush L.

ブッシュの内径 Bush I.D.

Clean Metal code